


NEW
**SIMPLY
MOTORIZED**


**CELLULAR
SHADES**

WWW.HTWFONLINE.COM




WHAT ARE INCLUDED IN THE PACKAGE


Motorized cellular shade & single-channel remote

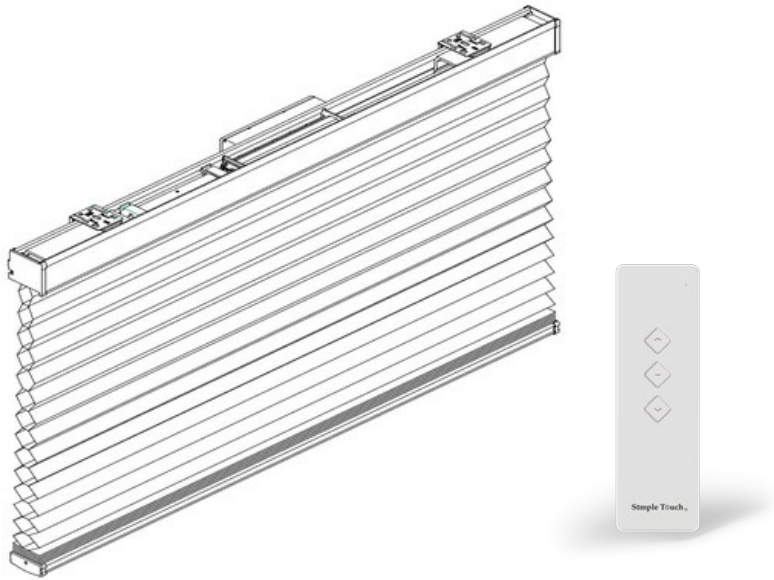

End caps

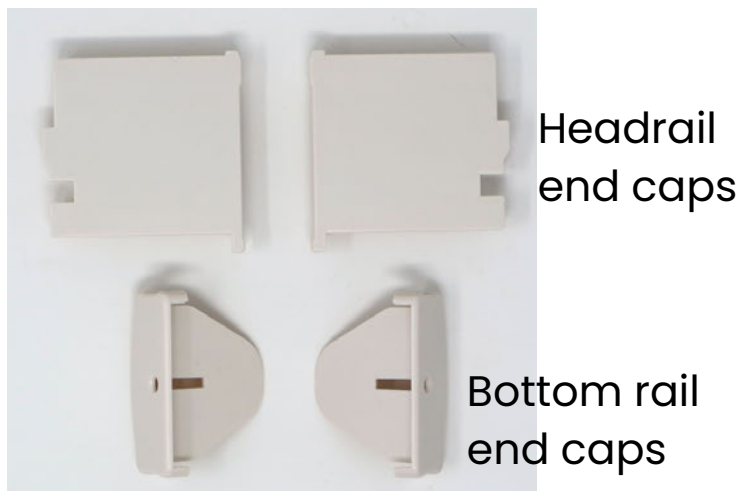


Instructions

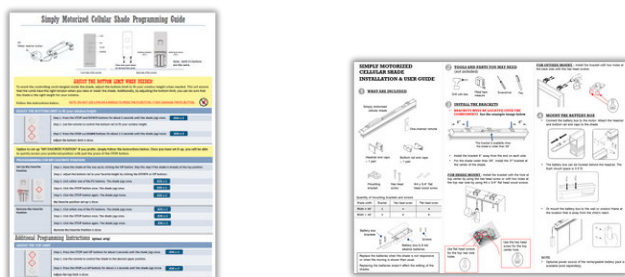


Mounting brackets & screws

Quantities based on the shade width

Shade width	Brackets	Hex-head screws	Flat-head screws
Width \leq 38"	2	4	4
Width $>$ 38"	3	6	6

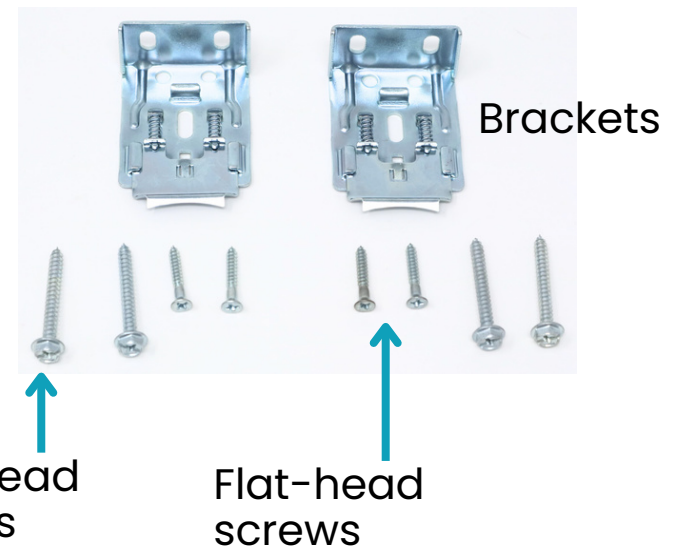

Battery box, hooks, screws, and 8 AA Lithium batteries

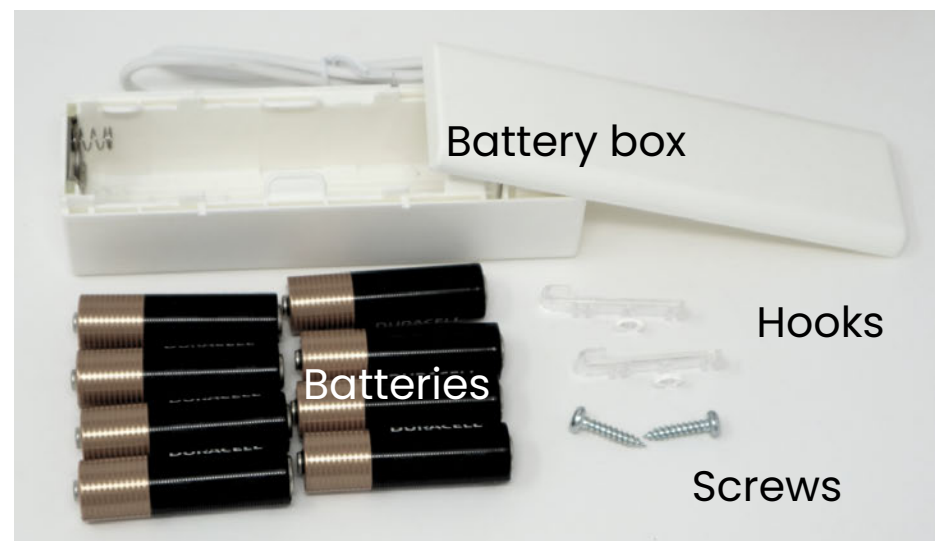



Included



1-CHANNEL REMOTE

of shades controlled

1

Group control

X

Speeds

Slow, medium, fast

My favorite position



Upgrade option



15-CHANNEL REMOTE

of shades controlled

15

Group control



Speeds

Slow, medium, fast

My favorite position




MEASURE YOUR WINDOWS AND CHOOSE YOUR SHADES

Step 1. Decide to install the shade with INSIDE MOUNT or OUTSIDE MOUNT.

Step 2. Use a METAL TAPE to measure your windows.

INSIDE MOUNT

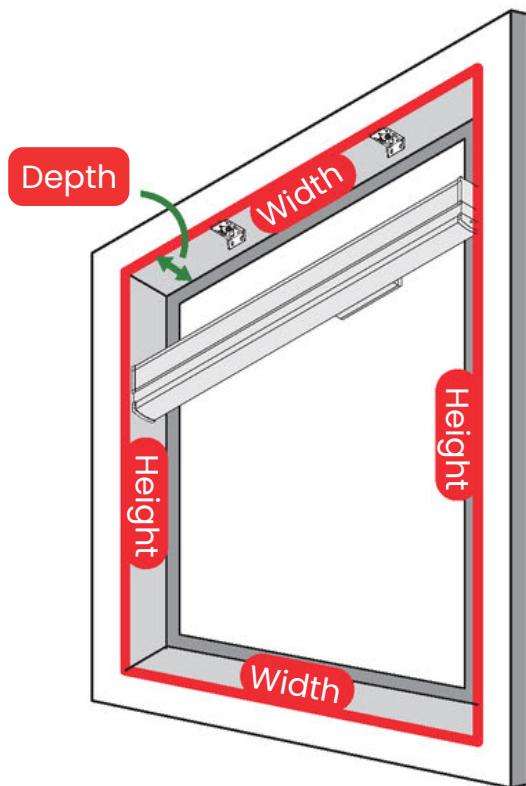


Width - Take 3 measurements, including top, center, and bottom. Order the shade width **1/4" ~ 1/2"** smaller than the narrowest measurement.

Height - Measure the window height.

Depth - Measure the depth of the window.

- The minimum mount space for the shade only is **0.5"D**.
- When the depth is less than **1.75"D**, please install the battery box to the wall or window frame.
- The flush mount space is **3.5"D** when hooking the battery box behind the headrail.

OUTSIDE MOUNT

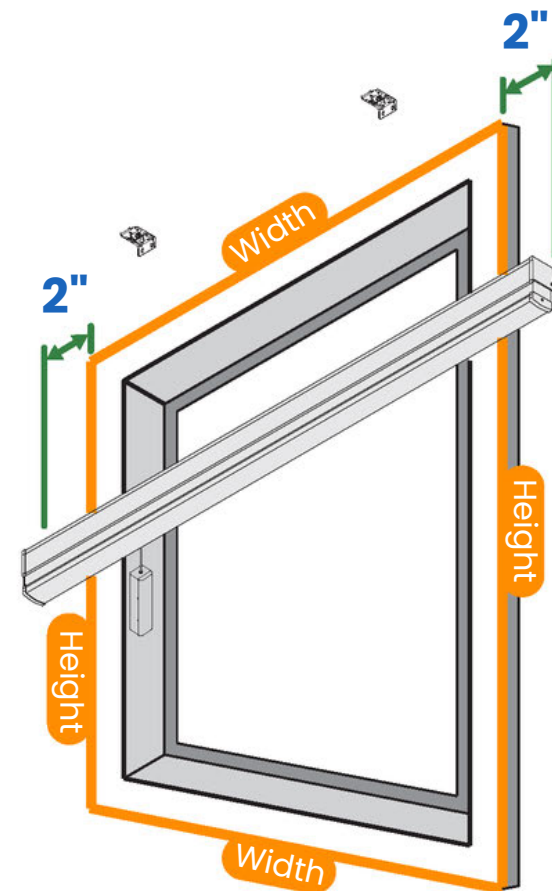

Width - Measure the exact width of the area to be covered. The overlap is usually 2" on each side.

Height - Measure the height that to be covered, including the desired overlap.


The shade width will be exactly the width you ordered. No additional deduction.

MOUNTING BRACKETS & SCREWS

INSIDE MOUNT

Option 1.


Install the bracket with the hole at top center by using one **hex head** screw.

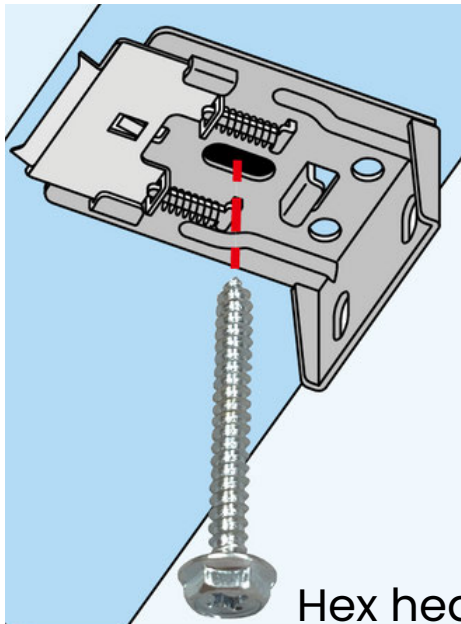

Hex head screw

Option 2.


Install the bracket with two holes at the top rear side by using **flat head** screws.

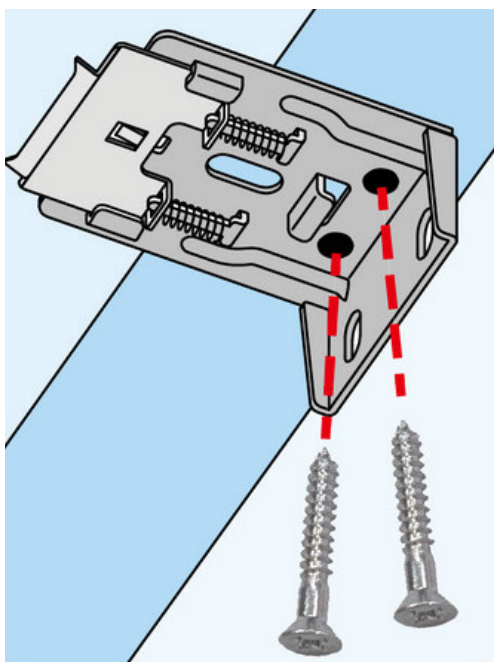

Flat head screws


OUTSIDE MOUNT

Install the bracket with two holes at the back side with **hex head** screws.

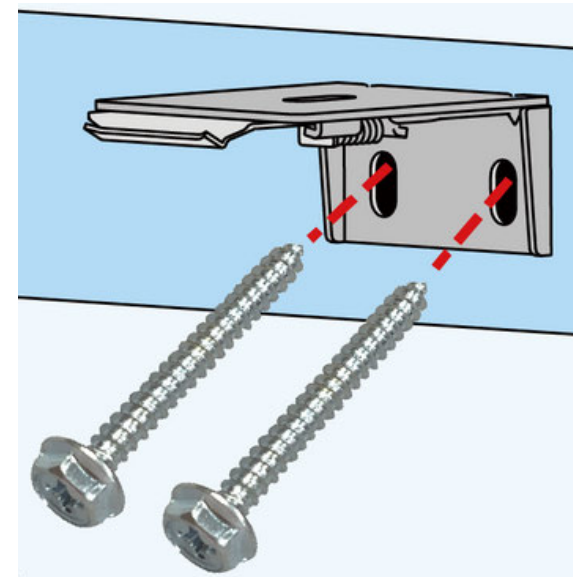

Hex head screw

HEX VS FLAT HEAD SCREWS

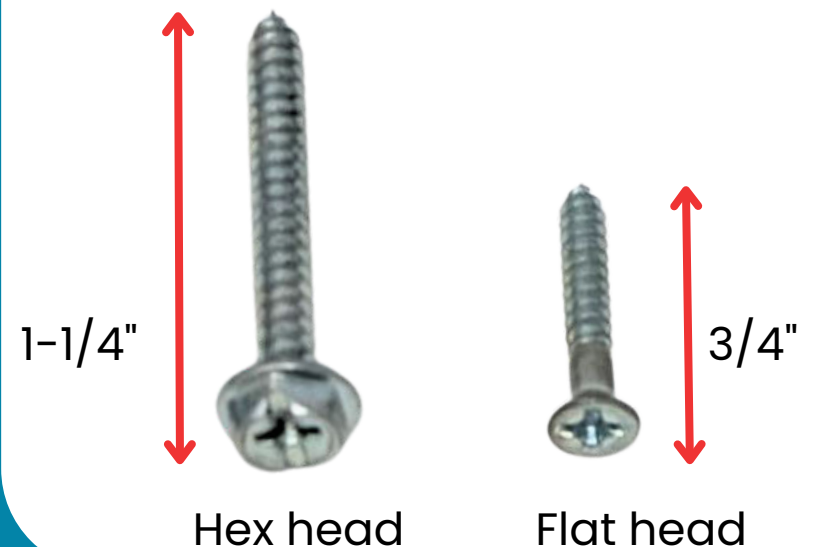

1-1/4"

Hex head


3/4"

Flat head

Connect to the power source,
either the battery box or
rechargeable battery pack

POWER SOURCES

Included

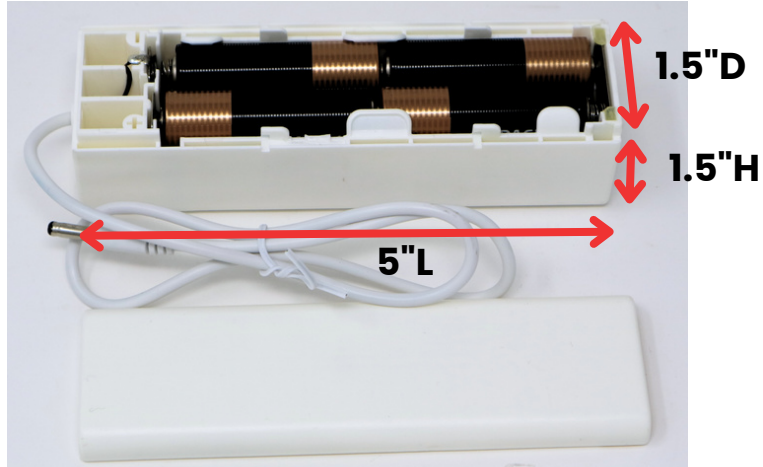

Battery box & 8 AA Lithium batteries

Upgrade option




Lithium rechargeable battery pack

3 Mounting location options:

- Behind the headrail
- Window frame
- Wall

**It is always white
on the outside of
the fabric.**



- **Protect from UV ray & diffuse the light**



- **Great insulation to save your energy bills**



- **Reduce noise**



- **Maintain privacy**

